Quarry project of

BUILDING STONE QUARRY OF MR. DINEESH VIJAYAN

APPLICANT

Mr. Dineesh Vijayan Orathaniyil House Kudakkachira PO Pala, Kottayam-686635

PROJECT LOCATION	
Area 0.7137 Ha	
Re-Sy.No	140/2, 140/2-1, 140/2-1-1
Village	Vallichira
Taluk	Meenachil
District	Kottayam
State	Kerala

FIRST HALF COMPLIANCE REPORT

(Ref: file. No. 1756/EC3/2020/SEIAA dtd.11/10/2022 (EC No: 164/Q/2022))

For the period up to

APRIL 2023 - SEPTEMBER 2023

Building Stone Quarry of Mr. Dineesh Vijayan

KUDAKKACHIRA P O, PALA KOTTAYAM

To,

Chairman/ Member secretary

District Environmental Impact Assessment Authority,

Kozhikode, Kerala

Sub: Environmental Clearance – Proposed quarry Project Re.Sy. No.140/2, 140/2-1, 140/2-1-1 at Vallichira Village, Meenachil Taluk, Kottayam District ,Kerala- First Half Compliance (April 2023– September 2023) report-Reg.

Ref: File No.1756/EC3/2020/SEIAA.dtd.11-10-2022 (EC No. 164/Q/2022)

Respected Sir,

Our Quarry project was accorded with Environmental Clearance vide order 1756/EC3/2020/SEIAA. dtd. 11-10-2022(EC No. 164/Q/2022). The First Half Compliance (April 2023 – September 2023) report of the specific and general conditions of the Environmental clearance is enclosed.

Thanking You

You're faithfully



Mr. Dineesh Vijayan

Owner

M/s. Building Stone Quarry of Mr. Dineesh Vijayan

Copy to

The Regional Director

MoEF Regional Office, southern zone, Kendriya Sadan, 4th Floor,

E&F Wing, II Block, Koramangala, Bangalore-560034.

TABLE OF CONTENTS

Item number	Description	Page number
I.	About the proponent	4
	About the project	5
	Project category	5
II.	Project location	5
	Project extent and activity	5
	Project description	5
	Report of compliance	6-21
III.	Compliance of specific condition 6-	
	Compliance of general condition	10-21
	Plate	
IV.	Plate S-5 : Green belt development	7
	Annexure	
	Annexure -1: Panchayath (D&O) License	24-25
	Annexure -2: Explosive License	27-33
	Annexure -3: Consent copy of KSPCB.	35-41
V.	Annexure -4: EC Advertisement in News Paper	43

I.ABOUT THE PROPONENT

Mr. Dineesh Vijayan, Owner of Building stone quarry of Mr. Dineesh Vijayan in Vallichira Village and Meenachil Taluk, Kottayam District, Kerala state.

State Environment Impact Assessment Authority (SEIAA) Kerala accorded Environmental Clearance No. 1756/EC3/2020/SEIAA dt.11-10-2022 to the quarry project Building stone quarry of Mr. Dineesh Vijayan in Vallichira Village, Meenachil Taluk, Kottayam District, Kerala, managed by Mr.Dineesh Vijayan.

The quarry project is controlled and managed by Mr. Dineesh Vijayan, Owner of Building stone quarry of Mr. Dineesh Vijayan Orathaniyil House, Kudakkachira PO ,Pala Kottayam– 686635; phone No:9497235695,e-mail: dinuv5695@gmail.com

II. ABOUT THE PROJECT

a. Project category:

The project comes under the Category B, Activity 1(a), (i) of Schedule of EIA Notification 2006 and subsequent amendments.

b. Project location:

Re.Sy. Nos. 140/2, 140/2-1, 140/2-1-1 at Vallichira Village, Meenachil Taluk, Kotayam District, Kerala State. The proposed project site falls within latitude and longitude value of

Latitude	9°46'26.37" N to 9°46'29.46" N
Longitude	76°37'43.53" E to 76°37'47.92" E

c. Project extent and activity:

The project is for quarrying of 31,502 MTA of building stone from an area of 0.7137 hectares of land located as specified above.

d. Project description:

The proposed project activity involves about 100 % of the pit area for exploring building stone. At the end of life of mine, excavated pit will be fully reclaimed and rehabilitated by plantation. The proposed project does not involve any underground mining activities. The mining is done by open cast semi mechanized method.

III. REPORT OF COMPLIANCE A. SPECIFIC CONDITIONS

Item	Stipulations in EC	Status of compliance
No.		_
S-1	The proponent shall carry out quarrying as per the approved mining plan and the component should strictly follow the Kerala minor mineral concession rules 2015 and amendments thereby	It will ensure that, the quarrying works will be done in only as per the approved mine plan
S-2	The EC shall be valid from the date of execution of permit/lease from the Department of mining and Geology. The copy of the lease order should be provided to the SEIAA before commencing the mining activity	The copy of the lease order will submit to SEIAA when before the starting of mining activities.
S-3	The impact of vibration due to blasting on the nearest houses and built structures should be monitored in terms of peak particle velocity and amplitude for maximum charge per delay and included in the first Half Yearly Compliance Report	The condition will be strictly follow
S-4	Blasting mats should be used during rock blasting to contain the blast, prevent fly rocks and suppress dust.	The condition will be strictly follow
S-5	Green belt should be developed all along the entire buffer zone in the first year itself and it should be nurtured and maintained.	The green belt developing activities are started, which mostly using the local species preventing air pollution

a sensor a Art.	18 Throng rest. 19 Throng rest. 10 Thr	Plate S-5 Plate S-5 Plate S-5
S-6	Compensatory afforestation should be done prior to the commencement of mining with indigenous species and the geo coordinates of the afforested place with photographs should be provided along with HYCR	Compensatory afforestaion works are under process
S-7	The overburden dump should be protected with retaining wall.	Mining process is not started, once it started the condition will be strictly follow
S-8	Garland drains should be laid covering the entire project area and it should be provided with intermittent silt traps at every 10m interval, siltation pond and out flow channel. There should be three siltation ponds arranged in a series which should be made with concrete.	Mining process is not started, once it started the condition will be strictly follow
S-9	Garland drains, silt traps, siltation pond and out flow channel should be desilted periodically and geo-tagged photographs should be incorporated in the HYCR.	Mining process is not started, once it started the condition will be strictly follow
S-10	The CER should be implemented in total during the first two years and it should be operated and maintained during the rest of the project life till the mine closure plan is implemented in total.	Mining process is not started, once it started the condition will be strictly follow
S-11	The haulage road should be maintained well.	The haulage road in good condition

S-12	Transportation of mined material should not	The condition will be strictly follow
	be done during the peak hours in the forenoon (8.00am to 10.00am) and afternoon	
	(3.00pm to 5.00pm)	
S-13	As per OM no F.No. 22-65/2017-IA.III	CER proposals were created by the
	dated 30 th September 2020, under Corporate	consultation with local self Govt.
	Environmental Responsibility (CER) the	institutions, the proposals will help
	project proponent shall prepare an	and promote the local people to carry
	Environment Management Plan (EMP) as directed by SEAC during appraisal, covering	good life
	the issues to address the environmental	
	problems in the project region, indicating	
	both physical and financial targets year wise.	
	The EMP shall be implemented I	
	consultation with local self Govt. institutions. The indicated cost for CER shall	
	be 2% of the project cost depending upon the	
	nature of activities proposed. The follow up	
	action on implementation of CER shall be	
	included in the HCYR which will be	
	subjected to field inspection at regular	
	intervals. A copy of the approved EMP shall be made available to the concerned	
	panchayath for information and	
	implementation support.	
S-14	In the wake of occurrence of large scale	The direction will implement when
	landslides in the state, as per the information	the mining works are started
	provided by the Department of Mining &	
	Geology, it is directed to use only	
	NONEL(None Electrical) technology for blasting to reduce the vibration of the	
	ground, which is one of the causative factors	
	that triggers landslides, formation of cracks	
	in the surrounding buildings and disturbance	
0.17	to human and wildlife.	
S-15	As per the direction contained in the OM	The condition will be strictly follow
	F.No.22-34/2018-IA.III dated 16 th January 2020 issued by MoEF & CC, in obedience to	
	the direction of the Hon'ble Supreme Court	
EC	Compliance Depart of Quanty Project of Duile	dia a stance and an area

	the project proponent shall, undertake re-	
	grassing the mining area and any other area	
	which may have been disturbed due to this	
	mining activities and restore the land to a	
	condition which is fit for growth of fodder,	
	flora, fauna etc. The compliance of this	
	direction shall be included in in the HYCR	
	which will monitored by SEAC at regular	
	intervals.	
S-16	The violation of EC conditions may lead to	Such condition will never arise
	cancellation of EC and action under The	
	Environment (protection) Act 1986	

B. GENERAL CONDITIONS

Item No	Stipulations in EC	Status of Compliance
G-1	The proponent should provide notarized affidavit (indicating the number and date of environmental clearance proceedings) that all the conditions stipulated in the EC shall be scrupulously followed.	Notarized affidavit was submitted to SEIAA.
G-2	All the statutory clearance should be obtained, as applicable, the project proponent from the respective competent authorities including that for blasting, and storage of explosives. Copies of all the statutory clearance shall be submitted along with First Half Compliance Report.	
G-3	The project proponent should advertise in news papers that the project has been accorded Environmental Clearance and copies of clearance letters are available in the Office of State Environment Impact Assessment Authority (SEIAA) and on the website of the Authority at www.seiaakerala.in . The advertisement should be in at least two local newspapers widely circulated in the region, one of which shall be in the vernacular language. The advertisement should be made within	The project proponent advertised about Environment Clearance in 2 local news papers and the copies of news paper forwarded to SEIAA ANNEXURE-4

	10 days from the date of receipt of the Environmental Clearance letter and a copy of the same signed in all pages should be forwarded to the office of this Authority as	
	confirmation.	
G-4	The proponent shall send a copy of the EC to concerned Grama Panchayat/ District Panchayat/ Municipality/ Corporation/ Urban Local Body and also to the Local NGO, if any, from whom suggestions/ representations, if any, were received while processing the proposal. The	l
	Environmental Clearance shall also be	
G-5	uploaded on the website of the company. The lease area shall be fenced with barbed wire to a minimum height of 4ft around, before starting mining. All the boundary indicators (boards, markings, etc) shall be conspicuous and maintained at all times.	The condition will be strictly follow
G-6	The details of Environmental Clearance should be prominently displayed in a metallic board of 3 ft x 3 ft with green background and yellow letters of Times New Roman font size of not less than 40. Sign board with extent of lease area and boundaries shall be depicted at the entrance of the quarry, visible to the public.	The condition will be strictly follow
G-7	Explosives should be stored in magazines in isolated place specified and approved by the Explosives Department. Mats to reduce fly rock blasts to a maximum of 10 PPV should be provided.	The project proponent obtained explosive license but mining works are till now not started and the magazine building work is under progress
G-8	Warning alarms indicating the time of blasting (to be done at specific timings) has to be arranged stipulated by Explosive Department.	The condition will be strictly follow

	Access roads to the quarry shall be black	0 1
G-9	topped to contain dust emissions that may	started the condition will be strictly
	arise during transportation of materials.	follow.
	The transportation of minerals should be	
	done in covered trucks to contain dust	
	emissions.	
	A separate Environmental Management	The EMC was constituted and it will start
G-10	Cell (EMC) with suitable qualified	its function when the mining works are
	personnel should be set-up under the	started
	chairmanship of a Senior Executive, who	
	will report directly to the Head of the	
	Organization. The Cell should have	
	representative of Biodiversity	
	Management Committee of the Panchayath	
	and a representative of NGO, if any active	
	in the area. The EMC should meet at least	
	once in six months and review the	
	activities and minutes should be a part of	
	the compliance report.	
	Quarrying has to be carried out as per	It will ensure that, the quarrying works
G-11	approved mining plan with the suggestions	will be done in only as per the approved
	from SEAC incorporated and following	mine plan
	KMMC rules 2015 and the Amendments	
	thereby.	
G-12	The quarrying operation (Blasting) shall be	The condition will be strictly follow
	restricted between 7 AM and 5PM	
	Rain Water Harvesting facility should be	
G-13	installed as per the prevailing provisions of	
	KMBR/KPBR, unless otherwise specified.	The condition will be strictly follow
	Maximum possible solar energy generation	
	and utilization shall be ensured as an	
	essential part of the project.	
	Maximum depth of mining shall be as per	
G-14	the mining plan and as per specific	The mining depth will not cross the local
	direction of SEAC after field inspection.	ground water table.
	The maximum depth of mining should not	
	he deeper then the local ground water	
1	be deeper than the local ground water	

	carried out at places having a slope greater than 45°.	
G-15	The height of any bench shall not exceed	The mentioned condition will strictly
G-13	five meters and breadth shall not be less	The mentioned condition will strictly
	than the height.	follow
0.16	The Project proponent shall ensure that no	-
G-16	perennial or intermittent natural water	
	course and/or water resources are	water resources are not obstructed due to
	obstructed due to any mining operations.	mining operations.
	Necessary safeguard measures to protect	
	the first order streams, if any, originating	
	from the mine lease shall be taken.	
0.17	A minimum buffer distance specified as	
G-17	per existing rules and statutory orders shall	without fail as per the recommendation of
	be maintained from the boundary of the	SEIAA
	quarry to the nearest dwelling unit or other	
	structures, and from forest boundaries or	
	any other ecologically sensitive and	
	archeologically important areas or the	
	specific distance specified by SEIAA in	
	EC as per the recommendations of SEAC	
	depending on specific local conditions.	
a 10	The proponent should plant seedlings at	
G-18	least 5 times of the loss of trees that has	
	occurred while clearing the land for the	
	project and follow planting measures as	
	suggested by SEAC. Suitable avenue trees	
	should be planted along the sides of the	
	approach road and internal roads and open	=
	parking areas, if any. Preference should be	follow
	given to endemic native and fruit bearing	
	species. Planting in buffer areas should be	
	taken up beforehand. Proper upkeep and	
	maintenance of planted seedlings shall be	
	ensured by the project proponent.	
	The proponent should ensure that the	
G-19	vegetation in the buffer is retained,	
	maintained and strengthened with	The mentioned condition will strictly

	additions of native broad leaved plants.	follow
G-20	Eco-restoration including the closure of mine as per the progressive closure plan and final closure plan shall be done at the cost of the project proponent. This eco-restoration should follow scientific standards available for restoration, full recovery of the original vegetation and improving the resilience of different ecosystems. Overburden materials should be managed within the site and used for reclamation of mined pit as per mine closure plan / specific conditions.	The mentioned condition will strictly
G-21	At least 10 percent out of the total excavated pit area should be retained as water storage areas and the remaining area should be reclaimed with stacked dumping and overburden and planted with suitable indigenous plant species, if no other specific condition on reclamation of pit is stipulated in the E.C. Monitoring and management of rehabilitated areas should continue until the vegetation becomes self-sustaining.	The mentioned condition will strictly
G-22	Control measures on noise and vibration prescribed by KSPCB should be implemented. Quarrying activities should be limited to day time as per KSPCB guidelines/specific conditions.	-
G-23	Periodical monitoring of the vibration at specified location (preferably at a distance of 50 m and 100 m) to be conducted and records kept for inspection. This could also form a part of the compliance reports.	
G-24	Speed of trucks entering or leaving the mine site is to be limited to moderate speed of 25 kmph to prevent undue noise from empty trucks.	The mentioned condition will strictly follow

-		-
G-25	Acoustic enclosures should be provided to reduce sound amplifications in addition to the provisions of green belt and hollow brick envelop for crushers so that the noise level is kept within prescribed standard limit indicated by CPCB/KSPCB.	The mentioned condition will strictly follow
G-26	Blasting should be done in a controlled manner using NONEL technique as specified by the regulations of Petroleum and explosive safety organization (GOI) or any other concerned authorized agency. A licensed person should supervise / control the blasting operations.	J 3 1
G-27	Measures should be taken for maintaining noise levels below 85 dBA in the work environment.	
G-28	Project proponent should obtain necessary prior permission of the competent authorities for drawing requisite quantity of surface water and ground water for the project.	At present there is no need for obtain prior permissions for drawing of surface and ground water for this project.
G-29	Regular monitoring of flow rates and water quality upstream and downstream of the springs and perennial nallahs flowing in and around the mine lease area shall be carried out and reported in the six monthly compliance reports to SEIAA.	The mentioned condition will strictly follow
G-30	Catch drains and siltation ponds of appropriate size shall be constructed around the mine working, mineral and OB dumps, to prevent run off of water and flow of sediments directly into the river and other water bodies. The water so collected should be utilized for watering the mine area, roads, and for green belt development etc. The drains shall be regularly desilted and maintained properly, particularly after monsoon.	Mining process is not started, once it started the condition will be strictly

	_	,
G-31	Regular monitoring of ground water level and quality shall be carried out around the mine area during mining operation. If any stage, if it is observed that ground water table is getting depleted due to the mining activity; necessary corrective measures shall be carried out.	The mentioned condition will strictly
G-32	Garland drains and silt traps are to be provided in the slopes around the core area to channelize storm water. De-silting of Garland canal and silt traps have to be attended on a daily basis. A labour has to be specifically assigned for the purpose. The proponent shall ensure the quality of the discharging storm water as per the General Effluent Discharge Standards of CPCB.	follow
G-33	In the case of any change(s) in the scope of the project, extent, quantity, process of mining technology involved or in any way affecting the environmental parameters/impacts as assessed, based on which the E.C was issued, the project would require a fresh appraisal by this Authority, for which the proponent shall apply and get the approval of this Authority. In the case of transfer of ECs, the matter shall be intimated and get the approval from the Authority as per the existing norms.	The mentioned condition will strictly
G-34	The stipulations by Statutory Authorities under different Acts and Notifications should be complied with, including the provisions of Water (Prevention and Control of Pollution) Act, 1974, the Air (Prevention and control of Pollution) Act 1981, the Environment (Protection) Act, 1986, the Public Liability (Insurance) Act, 1991 and EIA Notification, 2006.	The mentioned condition will strictly follow

The top soil, if any, shall be temporarily stored at earmarked place (s) and used for land reclamation and plantation. The over burden (OB) generated during the mining operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out based on the Notification 2009, as			
land reclamation and plantation. The over burden (OB) generated during the mining operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		1	
burden (OB) generated during the mining operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of goo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		_ ` ` ` `	
operations shall be stacked at earmarked dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		land reclamation and plantation. The over	
dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		burden (OB) generated during the mining	
dump site(s) only. The maximum height of the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		operations shall be stacked at earmarked	Mining process is not started, once it
the dumps shall not exceed 8m and width 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		dump site(s) only. The maximum height of	started the condition will be strictly
G-35 20m and overall slope of the dumps shall be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		the dumps shall not exceed 8m and width	follow.
be maintained at 450. The OB dumps should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	G-35	<u> </u>	
should be scientifically vegetated with suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		<u>-</u>	
suitable native species to prevent erosion and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		_	
and surface run off. At critical points, use of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		, , ,	
of geo textile shall be undertaken for stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
stabilization of the dump. Protective wall or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		_	
or gabions should be made around the dump to prevent erosion / flow of sediments during rains. The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
dump to prevent erosion / flow of sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		_	
sediments during rains .The entire excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
excavated area shall be backfilled. All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		1 1	
All the mining equipment used in Mining like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
like backhoe loaders and excavators cause pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
pollution and hence shall be serviced regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			The mentioned condition will strictly
regularly & maintained for their efficient functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
G-36 functioning and for reducing pollution. Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		=	lollow
Disposal of spent oil from diesel engines should be as specified under relevant Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	C 26		
should be as specified under relevant Rules/Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	U-30		
Rules/ Regulations. All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		1	
All vehicles used for transportation and within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		=	
within the mines shall have 'PUC' certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			
certificate from authorized pollution checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		-	
checking centre. Washing of all vehicles shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			<u>-</u>
G-37 shall be inside the lease area. Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		1	IOHOW
G-38 Effective safeguard measures such as regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	C 27		
G-38 regular water sprinkling shall be carried out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	G-3/		
G-38 out in critical areas prone to air pollution such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out		=	Minima managaria aya da
such as haul road, loading and unloading points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	C 20	1 0	
points and transfer points and having high levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out	U-38		· 1
levels of PM10 and PM2.5. Monitoring of Ambient Air Quality to be carried out			10110W.
Ambient Air Quality to be carried out		1 2 2	
based on the Notification 2009, as		- •	
	_	based on the Notification 2009, as	


	amended from time to time by the Central Pollution Control Board.	
G-39	Fugitive dust emissions from all the sources should be controlled regularly. Water spraying arrangement at project site, parking area, on haul roads, loading and unloading and at transport points should be provided and properly maintained.	started the condition will be strictly
G-40	Corporate Environmental Responsibilities (CER) as prescribed by SEIAA/SEAC should be carried out leading to Environmental stability of the Project region. The activities carried out under CER should be a part of the half yearly compliance report. The certificates from the beneficiaries, if the CER part is completed should also be submitted to the State Environment Impact Assessment Authority (SEIAA) along with year wise expenditure.	started the condition will be strictly follow.
G-41	The project proponent is responsible for implementing all the provisions of labour laws applicable from time to time to quarrying/Mining operations. The workers on the site should be provided with on-site accommodation or facilities at a suitable boarding place, protective equipment such as ear muffs, helmet, etc.	Mining process is not started, once it started the condition will be strictly
G-42	The proponent has to provide insurance protection to the workers in the case of existing mining or provide the affidavit in case of fresh lease before execution of mining lease.	follow
	Occupational health surveillance program of the workers should be undertaken periodically to observe any contractions due to exposure to dust and take corrective	Mining process is not started, once it started the condition will be strictly follow.

G-43	measures, if needed. The report of health Surveillance programme should be included in the half yearly compliance reports.	
G-44	The pits in the abandoned quarries and in the mined area shall be used for activities like water harvesting, aqua culture etc. in an eco friendly manner.	· · · · · · · · · · · · · · · · · · ·
G-45	If Government land is partly or fully used for mining, the area shall be returned at the end of lease period after mine closure with separate demarcation with suitable survey marks.	No Govt. land is using in this project.
G-46	Any accident occurring in the mined out area after the lease period due to negligence in carrying out safety measures and non-closure, will lead to suspension of all EC obtained for mining by the Proponent.	No such condition will arise.
G-47	In case of transfer of EC the matter shall be intimated and approval from the Authority shall be obtained as per the existing norms.	•
G-48	The proponent shall submit Half Yearly Compliance Reports (1st of June & 1st of December) on the status of compliance of the stipulated EC conditions including results of monitored data (both in hard copies as well as by e-mail) and upload the status of compliance of the stipulated EC conditions, including results of monitored data on their website and shall update the same periodically. It shall be simultaneously sent to the respective Regional Office of Ministry of Environment, Forests and Climate Change,	April 2023 to September 2023

_		
	Govt. of India and also to the Office of	
	State Environment Impact Assessment	
	Authority (SEIAA). The proponent has to	
	submit Environmental statement in form V	
	of Environment (Protection) Rules 1986 to	
	SPCB on 31stMarch every year.	
G-49	The project authorities should extend full	The proponent will always cooperate with
	cooperation to the officer(s) from the	
	Regional Office of MOEF & CC located at	l •
	Bangalore/SEAC/SPCB/CPCB/dept of	1 ,
	Mining and Geology, while monitoring	
	compliance of the stipulated conditions, by	
	furnishing the requisite data/ information/	
	monitoring reports.	
G-50	The above conditions shall prevail	
	notwithstanding anything to the contrary,	
	in consistent, or simplified, contained in	· · · · · · · · · · · · · · · · · · ·
	any other permit, license on consent given	
	by any other authority for the same project.	
G-51	The Authority reserves the right to add	It will ensure to follow all the safeguard
	additional safeguard measures	measures of the authority
	subsequently, if found necessary, and to	, and the second
	take action including revoking of the	
	Environment Clearance under the	
	provisions of the Environment (Protection)	
	Act, 1986, to ensure effective	
	implementation of the suggested safeguard	
	measures in a time bound and satisfactory	
	manner.	
G-52	The EC given will be withdrawn at any	
	time if the area is declared high hazardous	It will obey such condition while arrives
	by the SDMA.	
G-53	The Environmental Clearance will be	
	subject to the final order of the courts on	There is no such conditions existing in
	any pending litigation related to the land or	_
	project, in any court of law.	
G-54	Any appeal against this Environmental	
	Clearance shall lie with the National Green	
-	·	

	Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of	
	the National Green Tribunal Act, 2010.	
G-55	Concealing the factual data or submission of false/fabricated data and failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under the provisions of Environment (Protection) Act, 1986.	arise like that the proponent will obey the
G-56	The SEIAA may revoke or suspend the	
	order, for non implementation of any of	
	the specific or any of the above conditions.	
	The SEIAA reserves the right to alter/	
	modify the above conditions or stipulate	
	any further condition in the interest of	
	environmental protection.	
G-57	-	Mining process is not started, once it
	metalliferous mines regulation under Mine	
	act, the height of any bench shall not	follow.
	exceed six meters and breadth shall not be	
	less than the height.	

ANNEXURES

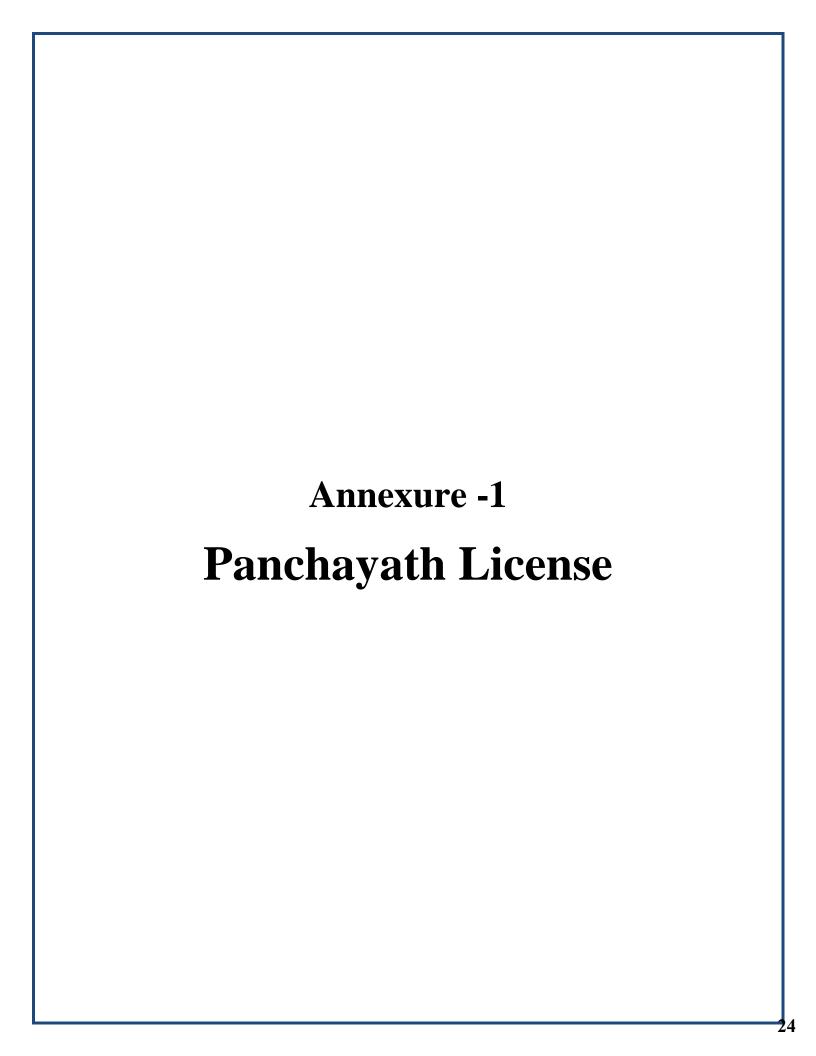



ലൈസൻസ് നമ്പർ : KLLSG-T-75/2023 തീയതി: 11-08-2023

കാരൂർ ഗ്രാമപഞ്ചായത്ത്

(1994 ലെ കേരള പഞ്ചായത്ത് രാജ് ആക്ട് (1994 ലെ 13) 232, 233, 234, 254 എന്നീ വകപ്പുകളും അവയ്ക്കുള്ള ഭേദഗതികളും തൽസംബന്ധമായ ചട്ടങ്ങളും ബൈലായും അനസരിച്ച് നൽകന്ന)

വ്യവസായ / ഫാക്ടറി / വ്യാപാര / സംരഭകത്വ / മറ്റ് സേവനങ്ങൾക്കുള്ള ലൈസൻസ്

ലൈസൻസിയുടെ പേരും മേൽവിലാസവും	Pala Kudakkachira B.O	aniyil House Kudakkachira Po Kottayam Kerala B.O,Kottayam,Kerala,686635	
സ്ഥാപനത്തിൻെറ പേരും , സ്ഥലനാമവും	Meenachil Granites, 140/2,140/2-1,140/2-1-1,Karoor,Meenachil		
ലൈസൻസ് നൽകിയിട്ടുള്ള പ്രവർത്തനങ്ങൾ	Granite Quarrying and Sale		
കെട്ടിടത്തിൻെറ നമ്പർ			
വാർഡു നമ്പർ			
സർവേ നമ്പർ	140/2,140/2-1,140/2-1-1		
അടു <u>ത്ത</u> ള്ള കെട്ടിട നമ്പർ	117		
ലൈസൻസ് കാലയളവ്	25-04-2023 മുതല് 31-03-2028 വരെ		
mmes solm cosimidati dati	രസീത് നമ്പർ	<u></u> @പ	
ഈടാക്കിയ ലൈസൻസ് ഫീസ്	72587	5000.00/-	

സെക്രട്ടറി _{കാത്രർ} ഗ്രാമപഞ്ചായത്ത്




ലൈസൻസ് താലെപ്പറയുന്നവ്യവസ്ഥകൾ അനുസരികേക്കണ്ടതാകുന്ന

- 1. കേരള പഞ്ചായത്ത് രാജ് ആകും അതിനെ തുടർന്നള്ള ചട്ടങ്ങളം ബൈലകളം അനസരിച്ച് പ്രവർത്തികേക്കണ്ടതാകന്നം.
- 2. തൊഴിൽ സ്ഥലവും അതിലുള്ള സാധന സാമഗ്രികളും പഞ്ചായത്ത് അധികാരികൾക്കോ/ സെക്രട്ടറി അധികാരപ്പെടുത്തുന്ന മറ്റ് ഉദ്യോഗസ്ഥർകക്കോ പരിശോധിക്കുന്നതിന് ലൈസൻസി വേണ്ട സൌകര്യം നല്കേണ്ടതും അവർ ആവശ്യപ്പെട്ടാൽ ഈ ലൈസൻസ് കാണിക്കേണ്ടതുമാകുന്നു.
- 3. ഏത് സ്ഥലത്തിൻറെ കാര്യത്തിൽ ലൈസൻസ് നൽകിയിരിക്കുന്നവോ ആ സ്ഥലത്ത് എല്ലാവരും കാണത്തക്ക വിധത്തിലുള്ള ഒരു ഭാഗത്ത് ലൈസൻസി തൻറ പേരും, ലൈസൻസിൻറ നമ്പരും ഉദ്ദേശവും കാണിക്കുന്ന ഒരു അടയാളപ്പലക വച്ചിരിക്കേണ്ടതാണ്.
- 4. പഞ്ചായത്തിൽ നിന്നും അനവാദം ലഭിച്ചശേഷമല്ലാതെ തൊഴിൽ സ്ഥലം മാറ്റാന് പാടില്ലാത്തതും തൊഴിൽ നിർത്തുന്ന പക്ഷം വിവരം മുന്കൂട്ടി പഞ്ചായത്തിൽ അറിയിക്കേണ്ടതുമാകുന്നു.
- 5. തൊഴിൽ സ്ഥലവും പരിസരങ്ങളും വൃത്തിയായും സാംക്രമിക രോഗാണക്കൾ ഉണ്ടാകാത്ത വിധത്തിലും പൊതുജനോപദ്രവമാകാത്ത വിധത്തിലും വ്യാപാരത്തിനു വച്ചിട്ടുള്ള ഭക്ഷണപദാർത്ഥങ്ങൾ ഈച്ച, അണക്കൾ , പൊടി മുതലായവയുടെ ശല്യം ഉണ്ടാകാത്ത വിധത്തിലും സൂക്ഷിക്കേണ്ടതാണ് .
- 6. ഓരോ പ്രവ്യത്തി ദിവസത്തിൻെറയും ഒടുവിൽ സ്ഥലം വ്യത്തിയാക്കേണ്ടതാണ്.
- 7. ആ സ്ഥലത്തിൻറയോ പരിസരത്തിൻറയോ ഏതെങ്കിലും ഭാഗത്ത് വീഴുകയോ നിക്ഷേപിക്കപ്പെടുകയോ ചെയ്യുന്ന ചപ്പചവറോ, മൃഗങ്ങളുടെ അവശിഷ്ടങ്ങളോ മറ്റ് പദാർത്ഥമോ ശേഖരിച്ച് സെക്രട്ടറിയ്ക്ക് തൃപ്ത്തികരമായ രീതിയിൽ നീക്കം ചെയ്യേണ്ടതാണ്.
- 8. ലൈസൻസി ഏതൊരു കെട്ടിടത്തിൻെറയും ചുവരുകളുടെയും അകവശത്തിൻെറ ഏതൊരു ഭാഗവും മേൽപ്പറഞ്ഞ പരിസരത്തിലുള്ള തറയും നടപ്പാതയും അവിടെ തെറിച്ചുവീഴാനിടയുള്ള ഏതെങ്കിലും ദ്രാവകമോ, മാലിന്യമോ, ചപ്പചവറോ, അസഹ്യവും, ഉപദ്രവകരവുമായ ഏതെങ്കിലും പദാർത്ഥമോ അവിടെ ലയിക്കുന്നത് തടയത്തക്കവിധം എപ്പോഴും നന്നായി കേട്ടപാട് തീർത്ത് നിലനിർത്തേണ്ടതാണ്.
- 9. ലൈസൻസി മേൽപ്പറഞ്ഞ സ്ഥലത്തോ, പരിസരത്തോ, അതോടു ചേർന്നോ ഉള്ള ഏതോരു ഓവ്വചാലും അഴുക്കുജലം കളയുന്നതിനുള്ള ഉപകരണവും എപ്പോഴും നന്നായി കേടുപാട് തീർത്തു വയ്യിക്കേണ്ടതാണ് .
- 10. അയിത്തം ആചരിക്കുന്ന കടകളടെ ലൈസൻസ് റദ്ദ് ചെയ്യുന്നതാണ്.
- 11. ഏതെങ്കിലും തരത്തിലുള്ള ത്വക്ക് രോഗമോ, കുഷ്യരോഗമോ, വ്രണമോ പകർച്ച വ്യാധികളോ ഉള്ള യാതൊരാളും കച്ചവടം നടത്തുന്നതിന് ഉപയോഗിക്കുന്ന സ്ഥലത്തം പരിസരത്തം പ്രവർത്തിക്കുവാന് പാടില്ലാത്തതാകുന്നു.
- 12. സർക്കാർ ഉത്തരവുകൾ പ്രകാരം നിരോധിച്ചിട്ടുള്ള പ്ലാസ്റ്റിക്കുകളും മറ്റ് നിരോധിത പ്ലാസ്റ്റിക് ഇനങ്ങളും ഉൽപ്പാദിപ്പിക്കുകയോ ശേഖരിക്കുകയോ വിൽല്ക്കുകയോ കൈകാര്യം ചെയ്യുകയോ ചെയാൻ പാടില്ല.
- 13. സ്ഥാപനത്തിൻെറ ബോർഡിൽ സ്ഥലനാമം മലയാളത്തിലും ഇംഗ്ലീഷിലും രേഖപ്പെടുത്തേണ്ടതാണ്.
- 14. 20 സീറ്റിൽ കൂടുതലുള്ള എല്ലാ ഹോട്ടലുകൾക്കും റെസ്റ്റോറൻറുകൾക്കും ടോയെലറ്റ് സൌകര്യം ഏർപ്പെടുത്തേണ്ടതാണ്.
- 15. നിരോധിത ഉൽപ്പ്നങ്ങളായ പാൻമസാല , ഗുഡ്ഖ തുടങ്ങിയവ സംഭരിച്ചവയ്ക്കവാനോ വിൽക്കുവാനോ പാടില്ല.
- 16.COPTA നിയമത്തിലെ വ്യവസ്ഥകൾ കർശനമായി പാലിക്കേണ്ടതാണ്.
- 17.ബാലവേല അനവദിക്കാൻ പാടില്ല.
- 18.വിവിധ NOC- കളിലെ നിബന്ധനകൾ പാലിക്കേണ്ടതാണ്.
- 19. മുകളിൽ കാണിച്ചിരിക്കുന്ന വ്യവസ്ഥകളുടെ ലംഘനം ഈ ലൈസൻസ് റദ്ദ് ചെയ്യപ്പെടുന്നതിന് കാരണമാകാവുന്നതാണ്.

സെക്രട്ടറി

NB: ലൈസൻസ് അവസാനിക്കുന്ന തീയതിക്ക് 30 ദിവസം മുമ്പ് ലൈസൻസ് പുതുക്കുന്നതിനുള്ള അപേക്ഷ സമർപ്പിക്കേണ്ടതാണ്.



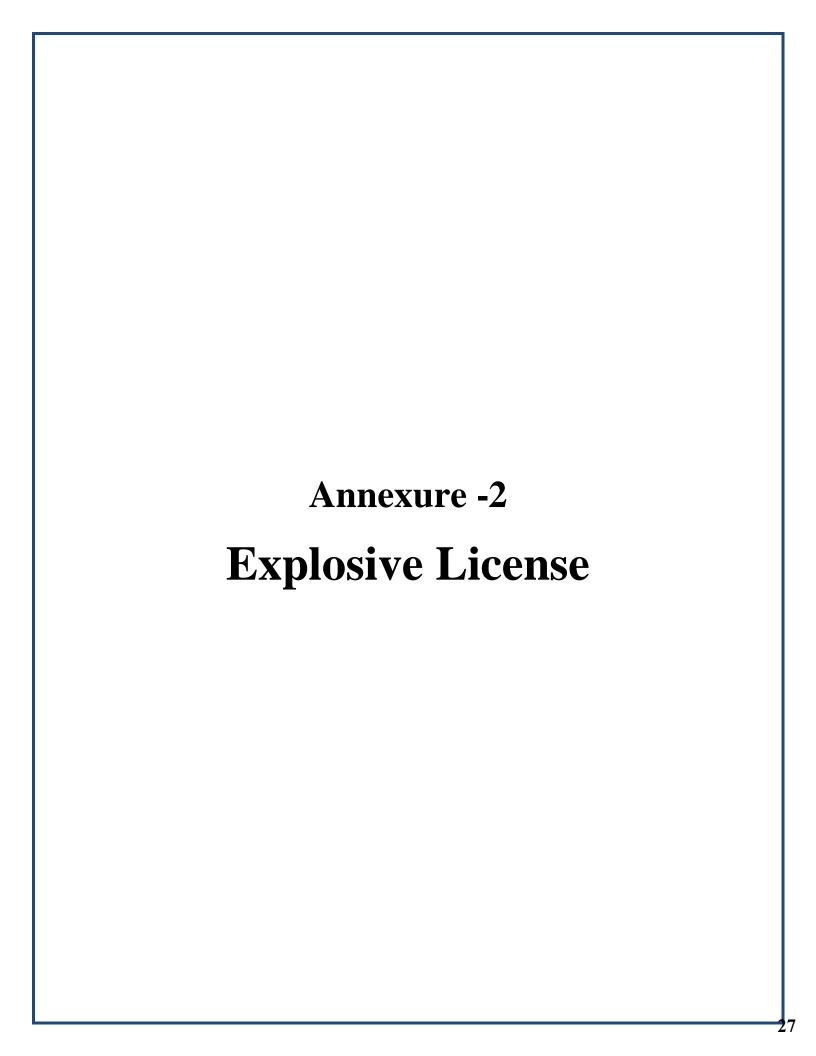



GOVERNMENT OF INDIA MINISTRY OF COMMERCE & INDUSTRY PETROLEUM AND EXPLOSIVES SAFETY ORGANISATION(PESO) (Formerly Department of Explosives) Kendriya Bhavan, Block C-2, 3rd Floor

CSEZ PO Kakkanad Dist. Ernakulam Ernakulam 682037 Tele: 2427286 Fax: 2427276 Email: dyccecochin@explosives.gov.in

No:E/SE/KL/22/374(E138078)

Dated: 27/02/2023

Shri Dineesh Vijayan, Orathaniyil House, Kudakkachira PO. Town/Village - Vallichira
Distt. KOTTAYAM, State. Kerala, Pincode-686635

Subject:

Possession for Use of Explosives from magazine at Survey No.:121/1A, Village/Town. Block No. 20, Vallichira, Meenachil Taluk, Distt. KOTTAYAM, State Kerala Licence No.: E/SE/KL/22/374(E138078) granted in Form LE-3 of Explosives Rules, 2008-Endorsement regarding

Sir(s),

Conditions:

1)Intimation regarding quarrying operations at Re-Survey Nos. 140/2, 140/2-1-1 of Vallichira Village of Meenachil Taluk, Kottayam District, Kerala vide Environmental Clearance No 164/Q/2022, File no. 1756/EC3/2020/SEIAA dated 11/10/2022 is acknowledged.

Reference memo No.: E/SE/KL/22/374(E138078) Dated 21/02/2023 from Dy. Chief Controller of Explosives, Ernakulam and inspection of the subject premises by an officer of this organization on 17/02/2023.

The subject licence No. E/SE/KL/22/374(E138078) valid upto 31st March 2027 duly endorsed as required under Rule 107(3) of the Explosives Rules 2008 is forwarded herewith.

For further renewal of licence, please submit following documents so as to reach this office on or before 31/03/2027.

Application in Form RE-1 duly filled in and signed.

In this connection, please also refer to Rule 112 of Explosives Rules, 2008.

Indent for purchase of explosives shall be placed in RE-11 with the supplier and copy of the same shall be sent to this office. (Not applicable for fireorks store house)
 Please submit quarterly returns of explosives in RE-7 at the end of every quarter so as to reach this office by 10th of the succeeding quarter. (Not applicable for fireorks store house)
 All blasting operations shall be carried out by a competent person holding a valid shot firer's permit granted under above rules. However, blasting operations in mines coming under the purview of the Mines Act 1952, the blaster shall have qualifications prescribed in the regulations framed under the said Act.

Yours faithfully,

(Anil Kumar T) Dy. Controller of Explosives
For Dy. Chief Controller of Explosives

1. District Magistrate, KOTTAYAM, Kerala with reference to his Noc No: DCKTM/79/2020/H4 Dated: 29/12/2021,

For Dy. Chief Controller of Explosives,

For more information reporting status, fees and other details, please visit our web site butn://explosives.gov.in/

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

> Digitally signed by ANIL KUMAR T Reason: Licence No. : E/SE/KL/22/374 Location:Ernakulam [E138078] Date:27-02-2023 13:33:27 PM

अनज्ञप्ति प्ररूप एल. ई.-3 | LICENCE FORM LE-3

(विस्फोटक नियम, 2008 की अनुसूची 4 के भाग 1 के अनुच्छेद 3(क) से (घ) देखिए।) (See article 3(a) to (d) of Part 1 of Schedule IV of Explosives Rules, 2008)

(ग) उपयोग के लिए एक समय पर वर्ग 1,2,3,4,5 या वर्ग 7 के विस्फोटक या किसी मैगजीन में वर्ग 6 के विस्फोटक रखने के लिए अनुज्ञप्ति Licence to possess: (c) for use, explosives of class 1, 2,3,4,5,6 or 7 in a magazine

अनुज्ञप्ति सं. (Licence No.) : E/SE/KL/22/374(E138078) वार्षिक फीस रुपए (Annual Fee Rs): 2400/-

1. Licence is hereby granted to

Shri Dineesh Vijayan (अधिभोगी / Occupier : Shri Dineesh Vijayan), Orathaniyil House, Kudakkachira PO., Town/Village - Vallichira, District-KOTTAYAM, State-Kerala, Pincode - 686635



को अनुज्ञप्ति अनुदत्त की जाती है।

2. अनज्ञप्तिधारी की प्रास्थिति। Status of licensee: Individual

3. अनज्ञप्ति निम्नलिखित प्रयोजनों के लिए विधिमान्य है। Licence is valid only for the following purpose.

possess for use of Nitrate Mixture, Safety Fuse, Ordinary/Electric/Non Electric Detonators, - के उपयोग के लिए

4. अनुज्ञप्ति विस्फोटकों के निम्नलिखित किस्मों, प्रकार और मात्रा के लिए विधिमान्य है। Licence is valid for the following kinds and quantity of explosives: -- (中) (a)

मात्रा किसी एक समय में नाम और विवरण वर्ग और प्रभाग उप-प्रभाग Quantity at any one time Class & Division Sub-division Sr. No. Name and Description 100 Kg. Nitrate Mixture 2,0 0 1. 2000 Mtrs 0 6,1 Safety Fuse 2. 2000 Nos. 0 Ordinary/Electric/Non Electric Detonators 6.3 3.

(ख) किसी एक कलैंडर मास में खरीदे जाने वाले विस्फोटक की मात्रा [अनुच्छेद 3(ख) और (ग) के अधीन अनुज्ञप्ति के लिए] (b) Quantity of explosives to be purchased in a calendar month[applicable for licence under article 3(b) and (c)]:

3 times as above.

5. निम्नलिखित रेखाचित्र (रेखाचित्रों) से अनुज्ञप्त परिसर की पृष्टि होती है।

रेखाचित्र क्र. (Drawing No.) E/SE/KL/22/374(E138078)

: दिनांक (Dated) 03/02/2023 The licensed premises shall conform to the following drawing(s): ,

6. अनजप्ति परिसर निम्नलिखित पते पर स्थित हैं। The licensed premises are situated at following address:

Survey No. 121/IA , प्राम (Town/Village) : Block No. 20, Vallichira, Meenachil Taluk पारास थाना (Police Station) : Pala

जिला (District)

KOTTAYAM

राज्य (State)

पिनकोड (Pincode)

686635

दुरभाष (Phone)

9497235695

ई. मेल (E-Mail)

फैक्स (Fax)

7. अनुज्ञप्ति परिसर में निम्नलिखित सुविधाएं अंतर्विष्ट हैं। The licensed premises consist of following facilities.

Two Portable magazines of H type No. 69 & E type No.1176 magazines fabricated by M/s.Thekkans Engineering & Fabrication Works, Ernakulam

8. अनुज्ञप्ति समय – समय पर यथासंशोधित विस्फोटक अधिनियम, 1884 और उनके अधीन विरचित विस्फोटक नियम, 2004 के उपबंधो, शर्तों और अतिरिक्त शर्तों और निम्नलिखित उपाबध्दों के अधीन रहते हए अनदत्त की जाती है। The licence is granted subject to the provision of Explosives Act 1884 as amended from time to time and the Explosives Rules, 2008 framed there under and the conditions,

additional conditions and the following Annexures. ।. उपर्युक्त क्रम सं. ५ में यथा कथित रेखाचित्र (स्थान, सन्निर्माण संबंधी और अन्य विवरण दर्शित करते हए)।

Drawings (showing site, constructional and other details) as stated in serial No. 5 above. 2. अनुज्ञप्ति प्राधिकारी व्दार्श हस्ता.क्षरित इस अनुज्ञप्ति की शर्तें और अतिरिक्ति शर्तें।

Conditions and Additional Conditions of this licence signed by the licensing authority.

3. दूरी प्ररूप DE-2 | Distance Form DE-2.

9. यह अनुज़प्ति तारीख **31 मार्च 2027** तक विधिमान्य रहेगी। This licence shall remain valid till **31st day of March 2027**.

यह अनुज्ञप्ति, अधिनियम या उसके अधीन विरचित नियमों या अनुसूची V के भाग 4 के प्रति निर्दिष्ट सेट-VII के अधीन तथा उपवर्णित इस अनुज्ञप्ति की शर्तों का अधिक्रमण करने या यदि अनुज्ञप्त परिसर योजना या उससे संलग्न उपबंध में दर्शित विवरण के अनुरूप नहीं पाए जाने पर निलंबित या प्रतिसंहत की जा सकती है, जहां वह लागू हो। This licence is liable to be suspended or revoked for any violation of the Act or Rules framed there under or the conditions of this licence as set forth under Set VIII, wherever applicable, referred to in Part 4 of Schedule V or if the licensed premises are not found conforming to the description shown in the plans and Annexure attached hereto.

तारीख। The Date - 03/02/2023

उप मुख्य विस्फोदक नियंत्रक | Dy. Chief Controller of Explosives

नवीनीकरण के पृष्ठांकन के लिए स्थान Space for Endorsement of Renewal

नवीकरण की तारीख Date of Renewal

समाप्ति की तारीख Date of Expiry

अनुज्ञापन प्राधिकारी के हस्ताक्षर और स्टाम्प Signature of licensing authority and stamp

<u>कानूनी चेतावनी</u> : विस्फोटकों को गलत ढंग से चलाने या उनका दुरूपयोग विधि के अधीन गंभीर दांडिक अपराध होगा। Statutory Warning: Mishandling and misuse of explosives shall constitute serious criminal offence under the law.

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

Form DE-2 (See rule 113 of the Explosives Rules, 2008)

(Distance Form to be attached to the licence)

Safety distances required to be kept clear around magazine for high explosives or fire works or factory licence number E/SE/KL/22/374(E138078) in form LE-3 granted to Shri Dineesh Vijayan, Orathaniyil House, Kudakkachira PO., Kerala-686635.

	Type of Structure(s)	Safety di met	
	Inside Safety Distances(ISD)	18	(14)
1 2 3	Room or Workshop used in Connection with the Magazine Any other Explosives Magazine or store House or Factory of the Applicant Magazine Office	11	17
	Middle Safety Distances(MSD)		
4	Magazine Keeper's or Chowkidar's Dwelling house		
5	Railway including Minerals and Private Railways		
6	Canal (in active use) or other navigable water		
7	Dock or Pier or Jetty		
8	Public Highway or Public Road		33
9	Private Road which is PRINCIPAL means of access to a Temple, Mosque, Churc Gurudwara or other places of worships, Hospital, College, School or Factory	:h,	
10	River Embankment or Sea Embankment or Public Well		
11	Reservoir or Bounded tank/rope way		
12	Windmillor or Solar panel for Power Generation		
	Companies in the companies of the compan		
	Outside Safety Distances(OSD)		
	Dwelling House		
	Govt. and Public Building		
	Temple, Mosque, Church or Gurudwara or other Places of Worships		
16	Shops, Market place, Public recreation and Sports Ground, College, School, Hospit Theater, Cinema or other Building where the public are accustomed to assemble	al,	
	Factory		
	Buildings or Works used for the Storage in Bulk of Petroleum, Sprit, gas, or oth inflammable or hazardous substances		45
19	Building or Works used for Storage and Manufacture of Explosives or of article which contain Explosives	es	15
20	Aerodrome		
	Furnace, Kiln or Chimney		
	Quarry or mine pit head		
	Power House or Electric Substation		
24	Wireless Station		
	Warehouse or other Storage Building		
26	Any other Protected works		
	and the second s		
	Overhead Electric lines		
27	Electric Power over head Transmission Lines above 440V		45
28	Electric Power over head Transmission Lines upto 440V		15

The Date: 03/02/2023

For Dy. Chief Controller of Explosives Ernakulam

Note: This is system generated document does not require physical signature. Applicant may take printout for their records.

मैगजीन में वर्ग 1,2,3,4,5,6, और 7 के विस्फोटकों को बिक्री या प्रयोग हेतु रखने के लिए प्ररूप एल.ई. 3 [अनुच्छेद 3 (ख) से (ग)] में मुख्य विस्फोटक नियंत्रक या विस्फोटक नियंत्रक व्यारा प्रदान किए जाने वाले अनुज्ञप्ति सं. E/SE/KL/22/374(E138078) की शर्ते निम्नलिखित हैं ।

The following are the conditions of licence number E/SE/KL/22/374(E138078) to possess for sale or use, explosives of Class 1,2,3, 4, 5, 6 and 7 in a magazine in Form LE-3 (articles 3(b) to (c)) granted by Chief controller of Explosives or Controller of Explosives.

1. परिसर में किसी भी समय विस्फोटकों की मात्रा अनुज्ञापन योग्य सामर्थ्य से अधिक नहीं होगी ।

The quantity of explosives on the premises at any one time shall not exceed the licensable capacity

विस्फोटकों के भंडारण के लिए प्रयुक्तर होने वाली मैगजीन अनुसूची III और अनुज्ञप्ति के उपाबंध में विनिर्दिष्ट सुरक्षा दूरी बनाए रखना होगा। The magazine used for storage of explosives shall maintain safety distance specified in Schedule III and annexure to the licence

- मैगजीन का प्रयोग उन सभी विस्फोटकों के, जो इस अनुज़प्ति में विनिर्दिष्ट है, रखे जाने के लिए और ऐसे रखे जाने से संबध्द आधान या औजार या उपकरणों के रखे जाने के लिए ही किया जाएगा: अन्यथा नहीं ।
 - The magazine shall be used only for keeping all explosives specified in this licence and of receptacles for, or tools or implements for work connected with the keeping of such explosives

4. पैकजों को खोलने का कार्य और विस्फोटकों को तौलने तथा पैक करने का कार्य मैगजीन में नहीं किया जाएगा ।

The opening of packages and the weighing and packing of explosives shall not be carried on in the magazine.

- 5. दो या दो से अधिक वर्णन के विस्फोटकों को, जिन्हें मैगजीन में रखे जाने की अनुज्ञा दी जा सकती है, मैगजीन में तभी रखे जाएंगे जब उनमें से प्रत्येक को. ऐसे पदार्थ या स्वरूप का कोई मध्यवर्ती विभाजक लगाकर या उनके बीच ऐसा मध्यवर्ती स्थान छोड़कर, परस्पर पृथक कर दिया जाए कि किसी वजह से विस्फोटक में लगने वाली आग या होने वाला विस्फोट किसी अन्य वर्णन के विस्फोटक तक न पहुँच सके : परंतू -
 - (घ) 2 (नाइट्रेट मिश्रण), वर्ग 3 (नाइट्रो योगिक) के विभिन्न विस्फोटक, वर्ग 6 प्रथम प्रभाग के अंतर्गत आने वाले सुरक्षा पलीते और वर्ग 6 प्रभाग 2 के अंतर्गत आनेवाले विस्फोटक प्रेरक पतीते, जिनमें कोई खुला लोहा या इस्पात नहीं है, एक दूसरे के साथ बिना किसी मध्यवर्ती विभाजक या स्थायन के रखे जा सकते हैं ।

(ङ) वर्ग ६ प्रभाग ३ के अंतर्गत आनेवाले विस्फोटक प्रेरेक अलग रखे जाएंगे ।

(च) वर्ग । के अंतर्गत आने वाले बारूद को अलग रखा जाएगा ।

Two or more description or explosives which may be permitted to be kept in the magazine shall be kept only if they are separated from each other by an intervening partition of such substance or character, or by such intervening space, as will effectually prevent explosion or fire in the one communicating with the other, Provided that

(d) the various explosives of Class 2 (nitrate-mixture), Class 3 (nitro-compound), safety fuses belonging to Class 6 Division 1 and detonating fuses belonging to Class 6 Division 2 as do not contain any exposed iron or steel, may be kept with each other without any intervening partition or space;

(e) Detonators belonging to Class 6 Division 3 shall be kept separately.

(f) Gun powder belonging to Class I shall be kept separately. 6. वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों को, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात सिवाय अनुज्ञापन प्राधिकारी की विशेष मंजूरी के मैगजीन में नहीं रखा

Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their manufacture except with the special sanction of licensing authority

7. वर्ग 3 (नाइट्रो योगिक) के विस्फोटकों की, उनके विनिर्माण की तारीख से एक वर्ष बीत जाने के पश्चात मैगजीन में तभी रखा जाएगा जब कि किसी विस्फोटक नियंत्रक ने इसके लिए विशेष मजुरी दे दी हो ।

(i) जब ऐसी मंजूरी दे दी गई हो तो प्रत्येक निरीक्षण पर किसी विस्फोटक नियंत्रक से ऐसा लिखित प्रमाणपत्र अभिप्राप्त कर लिया जाए जिसमें दी गई मंजूरी के अंतर्गत आनेवाली अविधि दर्शित की गई हो और ऐसे प्रमाणपत्र के अनुज्ञप्तिधारी अपने पास रखेगा और मांग की जाने पर प्रस्तुरत करेगा ।

(ii) जब कोई विस्फोटक मानक शुध्दता का न रह जाने के कारण या द्रवणीकरण या नाइट्रो ग्लीअसरीन या द्रव नाइट्रो योगिक के निकल जाने के चिन्ह प्रकट होने के कारण मैगजीन में भण्डारित किए जाने के उपयुक्त नहीं रह जाता है तो अनुज्ञप्तिधारी अपने ही व्यय पर ऐसे विस्फोटक के निपटारे के लिए ऐसे निदेशों का अनुपालन करेगा जो मुख्य नियंत्रक या विस्फोटक नियंत्रक जारी करें।

Explosives of Class 3 (nitro compound) shall not be kept in the magazine after the expiration of one year from the date of their manufacture except with the special sanction of the Controller of Explosives.

(i) When such sanction has been given, a written certificate showing the period covered by the sanction shall be obtained from the Controller of Explosives at each inspection, and shall be kept by the licensee and produced on demand.

(ii) When an explosive owing to its being no longer of standard purity or owing to signs of liquefaction or of exuded nitro-glycerin or liquid nitro-glycerin or liquid nitro-compound is no longer fit for storage in the magazine or store house the licensee shall comply, at his own expense, with such directions as to its disposal as the Chief Controller or Controller of Explosives may issue.

8. मैगुजीन के भीतरी भाग या उसमें लगी बैचो. शेल्फों और उसकी फिटिंग का इस प्रकार सित्रमीण किया जाएगा या उन्हें इस प्रकार अंतरित या अवतरित किया जाएगा कि विस्फोटक का किसी लोहे या इस्पात के साथ संपर्क रोका जा सके । भीतरी भाग में लगी बेंचे, शैल्फें और फिटिंग यथासाध्य ग्रिट से मुक्त एवं साफ रखे जाएंगे तथा ऐसे विस्फोटक, जो जल से खतरनाक रूप में प्रभावित हो सकते हैं, इस बाबत सम्यक सावधानी बरती जाएगी कि वहां कोई जल मौजूद न रहे : परंतु किसी लोहे या इस्पात के खुले होने के विरूध्द सावधानी से संबंधित इस शर्त का वह भाग ऐसे किसी भवन में बाध्येकर नहीं होगा जिसमें वर्ग 6 (गोला बारूद) के प्रथम के विस्फोटक से भिन्न कोई विस्फोटक रखा गया है। The interior of the magazine and the benches, shelves and fittings therein shall be so constructed or so lined or covered as to prevent the exposure of any iron or

steel contact with the explosives. Such interior, benches, shelves and fittings shall so far as is reasonably practicable, be kept free from grit and shall otherwise be clean; and in the case of any explosives liable to be dangerously affected by water, due precautions shall be taken to exclude water there from; Provided that so much of this condition as relates to precautions against the exposure of any iron or steel shall not be obligatory in a building in which no

explosive other than explosive of the 1st Division 6th (Ammunition) Class is kept.
9. यदि तहित चालक का परीक्षण विस्फोटक नियंत्रक करता है तो अनुज्ञाप्तिधारी ऐसे परीक्षण के लिए विहित फीस का संदाय करेगा यदि परीक्षण असमाधानकारी साबित होता है तो उतनी ही फीस अनुज्ञप्तिधारी व्दारा पश्चात्वर्ती प्रत्येक परीक्षण के लिए तब तक दी जाती रहेगी जब तक कि परीक्षण अधिकारी तिडत चालक को समाधानप्रद घोषित नहीं कर देता

परंतु किसी एक परीक्षण के लिए देय फीस किसी एक दिन के दौरान किसी चालक के किए गए सभी परीक्षणों के लिए प्रभार्य होगा

परंतु यह और कि यदि दो या अधिक तडित चालक एक ही मैगजीन से संबध्द हैं तो ऐसे सभी चालकों के परीक्षण के लिए फीस ऐसी किसी फीस से अधिक नहीं होगी जो किसी एक तड़ित चालक के परीक्षण के लिए हर स्थिति में विहित की गई है।

If the lighting conductor is tested by the Controller of Explosives, the licensee shall pay the fees prescribed for test. In the even of the test proving unsatisfactory, the same fees shall be payable by the licensee for each subsequent test until the lighting conductor is passed by the testing officer as satisfactory:

Provided that the fees payable for a single test shall be charged for all tests made on a conductor during any one day

Provided further that where two or more lighting conductors are attached to one and the same magazine, the fee for the testing of all such conductors shall not exceed the fee prescribed in this condition for testing a single lighting conductor.
10. उपयुक्त तथा जेब रहित कार्यकरण वस्त्रों , उपयुक्त जूतों के प्रयोग व्यारा तथा तलाशी लेकर या अन्यथा अथवा ऐसे किन्हीं साधनों व्यारा इस बाबत सम्यक् उपबंध किया जाएगा

कि फैंक्ट्री परिसर में अग्नि, दियासलाई अथवा ऐसी कोई वस्तुोए या पदार्थ, जिससे विस्फोट हो सकता है या आग लग सकती हो, किन्तु इस शर्त के कारण ऐसी संरचना, स्थिति या स्वरूप में किसी कृत्रिम बत्ती का प्रवेश वर्जित नहीं है जिससे आग लगने या विस्फोट होने का खतरा न हो

परंतु इस शर्त का वह भाग, जो लोहे या इस्पात के अपवर्जन को लागू होता है, ऐसे किसी भवन के संबंध में बाध्य कर नहीं होगा जिससे भिन्न कोई विस्फोटक नहीं रखा गया है । Due provisions shall be made, by the use of suitable working clothes without pockets, suitable shoes and by searching or otherwise or by such means, for preventing the introduction into danger area of the factory premises of fie, Lucifer matches or any substance or article likely to cause explosion or fire, but this condition shall not prevent the introduction of an artificial light of such construction, position or character as not to cause any danger of fire or explosion: Provided that so much of this condition as applies to the exclusion of iron or steel, shall not be obligatory in a building in which no explosive other than an

explosive of the 1st Division of the 6th (Ammunition) Class is kept.

- 11 अनुज्ञाप्तुधारी प्ररूप आर. ई.-3 ओर आर. ई.-4 या आर. ई.-5, जेसी स्थिति हो, में सभी विस्फोटकों का आंभेलेख और लेखा रखेगा और विस्फोटक नियम. 2008 के अधीन प्राधिकत किसी भी अधिकारी के समक्ष उसके व्दारा ऐसा करने की मांग की जाने पर स्टाक पुस्तक और अभिलेख प्रस्तुत करेगा । स्टाक पुस्तक विहित प्रोफार्मा में पृष्ठ संख्यांकित होगी । The licensee shall keep records and accounts of all explosives in Forms RE-3 and RE-4 or RE-5, as the case may be, and exhibit the stock books and records to any of the officers authorised under the Explosives Rules, 2008 whenever such officer may call upon him to do so. The stock books in the prescribed proforma
- 12. परिसरों में कोई परिवर्तन या तबदीली अनुज्ञापन प्राधिकारी के पूर्वानुमोदन बिना नहीं की जाएगी और अनुज्ञप्तिधारी ऐसी किसी शर्त का अनुपालन करेगा जो इस निमित्त अनुज्ञापन प्राधिकारी विनिर्दिष्ट करें।

No changes or alterations shall be carried out to the premises without prior approval of the licensing authority and the licensee shall comply with any condition

that may be specified by the licensing authority in this behalf. 13. मैंगजीन सभी समयों पर अच्छी मरम्मत की स्थिति में बनाई रखी जाएगी (या अच्छी हालत में बनाई रखी जाएगी) । यदि किसी कारणवश किसी विस्फोटक के भण्डारण के लिए मैगजीन अनुपयुक्त हो जाती है तो अनुज्ञप्तिधारी इस बात की सूचना अनुज्ञापन प्राधिकारी को तुरंत देगा ।

Magazine shall at all times be kept in state of good repair (or maintained in good condition). The licensee shall report to licensing authority forthwith, if the magazine becomes untit for storage of any explosives for any reason whatsoever

मैंगजीन का अनुज्ञप्तिधारी इन नियमों के नियम 24 के उप-नियम 3 के अनुसार त्रैमासिक विवरणी प्रस्तुत करेगा ।

The licensee of the magazine shall submit quarterly return as per sub-rules (3) and (4) of rule 24 of these rules. 14. यदि सुरक्षा दूरी का कोई अधिक्रमण होता है तो उसकी सूचना अनुज्ञापन प्राधिकारी को आवश्यक सलाह और कार्यवाही के लिए तुरंत दी जाएगी । Any encroachment of the safety distance shall be immediately communicated to the licensing authority for necessary advice and action. यदि कोई विस्फोटक विनष्ट हुआ अथवा अनुपयोगी जाया जाता है तो उसकी सूचना अनुज्ञापन प्राधिकारी को, सलाह प्राप्त करने के लिए, तुरंत दी जाएगी ।

The licensing authority shall be immediately informed for advice if any explosive is found deteriorated or unserviceable.

16. विस्फोटकों के पैकेटों के चट्टे इस प्रकार लगाए जाएंगे कि कम से कम एक व्यक्ति भण्डार किए गए सभी पैकजों की हालत की जांच करने और प्रत्येक पैकेज की विनिर्माण विशिष्टियों को पढ़ने के लिए उनके बीच से होकर आ जा सके।

The explosive packages shall be stocked in such a way so as to allow movement of at least one person to check the condition of all packages stored and to read the manufacture particulars of each package.

तिहत चालकों की भिम के लिए प्रतिरोध यथासंभव न्यनतम होगा और किसी भी दशा में 10 ओहा से अधिक नहीं होगा ।

The resistance of the lightning conductor to earth shall be as low as possible and in no case be more than 10 ohms.

17. मैगजीन के चारों ओर 15 मीटर की दूरी के अंतर्गत कोई शुक्क घास या झांड़ी या ज्वलनशील सामग्री नहीं रहने दी जाएगी।

A distance of 15 meters surrounding the magazine or store house shall be kept clear of dried grass or bush or flammable materials.

18. विस्फोटकों के प्रत्येक पैकेट की, जब उसे मैगर्जीन के भीतर लिया जा रहा हो, ठीक देशा जानने के लिए परीक्षा की जाएगी । Every package of explosive at the time of bringing inside the magazine shall be examined for its sound condition.

किसी मैगजीन / भंडारगृह में किसी एक समय में चार व्यक्तियों से अधिक को नहीं रहने दिया जाएगा ।

Not more than 4 persons shall be allowed inside the magazine or store house at any one time. 20. विस्फोटकों के खाली पैकजों को शीघ्रतिशीघ्र वहां से हटा दिया जाएगा और नष्ट कर दिया जाएगा।

Empty packages of the explosives shall be removed at the earliest and destroyed. \

21. अनुज्ञप्तिथारी और कर्मचारीयों को परिसर के भीतर आपातकाल के दौरान की जाने वाली प्रक्रियाओं से अवगत होना चाहिए ।

The licensee and the employee shall be conversant with procedure to be taken during the emergency within the premises.

22. निरीक्षण या नुमूना अधिकारी को सभी युक्तियुक्त समयों पर अनुज्ञत परिसर में अबाध रूप से पहुंचने दिया जाएगा और यह सुनिश्चित करने के लिए कि अधिनियम और इन नियमों के उपबंधों और सुरक्षा स्थितियों को सम्यकत: अनुपालन किया जा रहा है, अधिकारी को प्रत्येक सुविधा प्रदान की जाएगी ।

Free access to the licensed premises shall be given at all reasonable times to any inspecting or sampling officer and every facility shall be afforded to the officer for ascertaining that the provisions of the Act and these rules and the safety conditions are duly observed.

23. यदि अनुज्ञापन प्राधिकारी या विस्फोटक नियंत्रक अनुज्ञाप्तिधारक को अनुज्ञात परिसरों या मशीनरी, टूल या उपकरण में ऐसी कोई मरम्मत या परिवर्धन या परिवर्धन करने या सिफारिशों को लागू करने को लिखित रूप में सूचित करता है जो परिसर के अंदर या बाहर या व्यक्तियों की सुरक्षा के लिए आवश्यक है, अनुज्ञाप्तिधारक सिफारिशों को निष्पादित करेगा और विनिर्दिष्ट अविध के भीतर अनुपालन रिपोर्ट ऐसे प्राधिकारी को देगा ।

If the licensing authority or a Controller of Explosives informs in writing, the holder of the licence to execute any repairs or to make any additions or alterations to the licensed premises or machinery, tools or apparatus or carry out recommendations, which are in the opinion of such authority may pose unacceptable risk and so necessary for the safety of either on-site or off-site of the premises or persons, the holder of the license shall execute the recommendations and report

compliance within the period specified by such authority.

24. अनुज्ञान्तिथारी मैगजीन में रखने और बिक्री के लिए प्राधिकृत विस्फोटक सूची में उल्लिखित अनुज्ञत फैक्टरी या कंपनी से प्राधिकृत विस्फोटक / आतिशबाजी या सुरक्षा पलीते खरीदेगा ।

The licensee shall purchase authorised explosives/ fireworks or safety tuse as mentioned in the list authorised explosives from a licensed factory or company for possession and sale from the magazine.

25. निम्न से अधिक ध्वनि स्तर उत्पादित करने वाले आतिशबाजियों पटाखों की बिक्री और रखने के लिए 🗕

(क) जो फटने की जगह से चार मीटर की दूरी पूर है, 125 डी.बी.(ए1) या 145 डी.बी.(सी)पी.के. प्रतिबंधित होंगे; (ख) श्रंखला (जुड़े हुए पटाख) को गठन करने वाले व्यक्तिगत पटाखों के लिए उपर्युक्त उल्लिखित सीमा 5 लॉग.10(एन) डी.बी. (सी) पी.के.प्रतिबंधित होंगे ;

The possession and sale of fire-crackers generating noise level exceeding;

a) 125 dB(AI) or 145 dB(C)pk at 4 meters distance from the point of bursting shall be prohibited; b) For individual fire-cracker constituting the series (joined fire-crackers), the above mentioned limit be reduced by 5 log10 (N) dB, where N = number of crackers joined together.
26. आग या विस्फोट व्हारा दुर्घटना या नुकसान पटाखों की कमी या चोरी, तुरंत पास के पुलिस थाने और अनुज्ञापन प्राधिकारी और अनुज्ञापन प्राधिकारी के स्थानीय कार्यालय को

रिपोर्ट की जाएगी।


Accidents by fire or explosion and losses, shortage or theft of explosives shall be immediately reported to the nearest police station and the licensing authority and local office of the licensing authority.


अतिरिक्त शर्वें / Additional Conditions :

1. अनञ्जप्तीधारी विदेशी मुल के आतिशबाजी को ना प्रदर्शित करेगा. ना रखेगा और ना ही उसकी विक्री करेगा । The licensee shall not exhibit, possess and sell fireworks of foreign origin.


कृते उप मुख्य विस्फोटक नियंत्रक For Dy. Chief Controller of Explosives एरणाकुलम | Ernakulam

Note :- This is system generated document does not require physical signature. Applicant may take printout for their records.

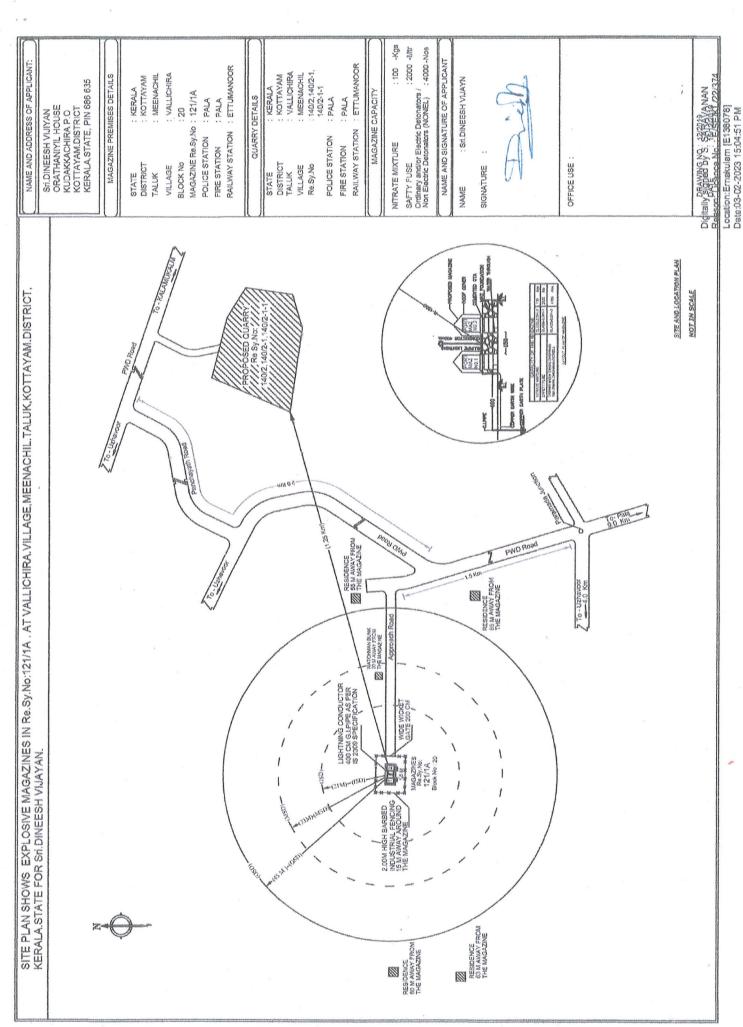

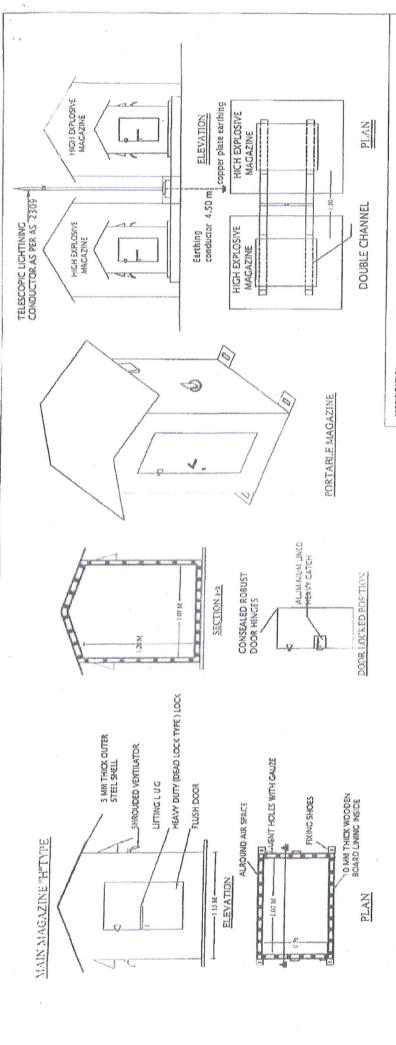

4	TIT TYPE MAGAZINE (150 KG) ACCOMODATES	ក្នុំរ	"E" TYPE MAGAZINE (50 KG) ACCOMODATES
	150 Kg High Explosives Class I,II,III		1) 50 Kg Hìgh Explosives Class I,II,III
8	S000 Meters Dectoting Fuse Saftey Fuse OR	52	2000 Meters Dectoting Fuse Saftey Fuse OR
m	6000 Nos Electric Detonators OR	8	2500 Nos Electric Delonators OR
5	25000 Nos Ordinary Detonators OR	4.	10000 Nos Ordinary Detonators OR
6	5000 Nos Electric Detonators & 5000 Nos Ordinary Detonators OR	S	2000 Nos Electric Detonators & 2000 Nos Ordinary Detonators OR
9	150 Kgs Of Explosive And 3000 Meters Of Saftey Fuse	6	50 Kgs Of Explosive And 2000 Meters Of Saftey Fuse
	PERMITTED TOLERANCE		PERMITTED TOLERANCE
	OUTER DIMENSIONS =(-) 2%		OUTER DIMENSIONS = (+) 2%



SPECIFICATION

- ALL sfeet plate are 5mm thick used in fabrication
- Interior lining at least 10 mm shick on walls cloors and ceiting and 25 mm thick on door and consisting of closed fittings boards or wood joined together by tongue and groove joints in such a way that no iron or steel is exposed on the interior sides, ceiling , floor or doors
- Ventilation by vent which are adequately protected
- External hinges of steel welded to the door and to the frame of magazine
 - · A lock of " dead Lock " type for external coor

The doors or lid must overlap the door opering by at least 1 inch (2.5 mm). Hinges, hasps and panels shall be welded , reveted , or bolted (with nuts on inside so they canot be removed or disassembled from the our side)

Fabrication drawing of Pertable Magazine for" H" Type 150 KG and 'E' type 50 KG ospacity of MS Thekkans Engineering and Pabrication works, VII / 154, Veliyanad P.O Ernckulam District, Kerala pin 682319 Fabrication shop at syNo.712/12 , Veliyanad, Edakkanuvayal Village ,Kanayannur Taluk,


This drawing is the property of the above firms. It should not be copied whole or in part with out their militar permission

Emakulam District, Pin 682 319, Kerala

"CERTIFIED THAT THE MAGAZINE HAVE ATION NOTA Stemanine EMCINITY THE

THE CHEF CONTROLLER OF EXPLOSIVER BEEN FABRICATES AS PER APPROVAL OF

Digitally signed by S. SARAVANAN Reason: Licence No. : E/SE/KL/22/374 Location:Ernakulam [E138078] Date:03-02-2023 15:06:03 PM

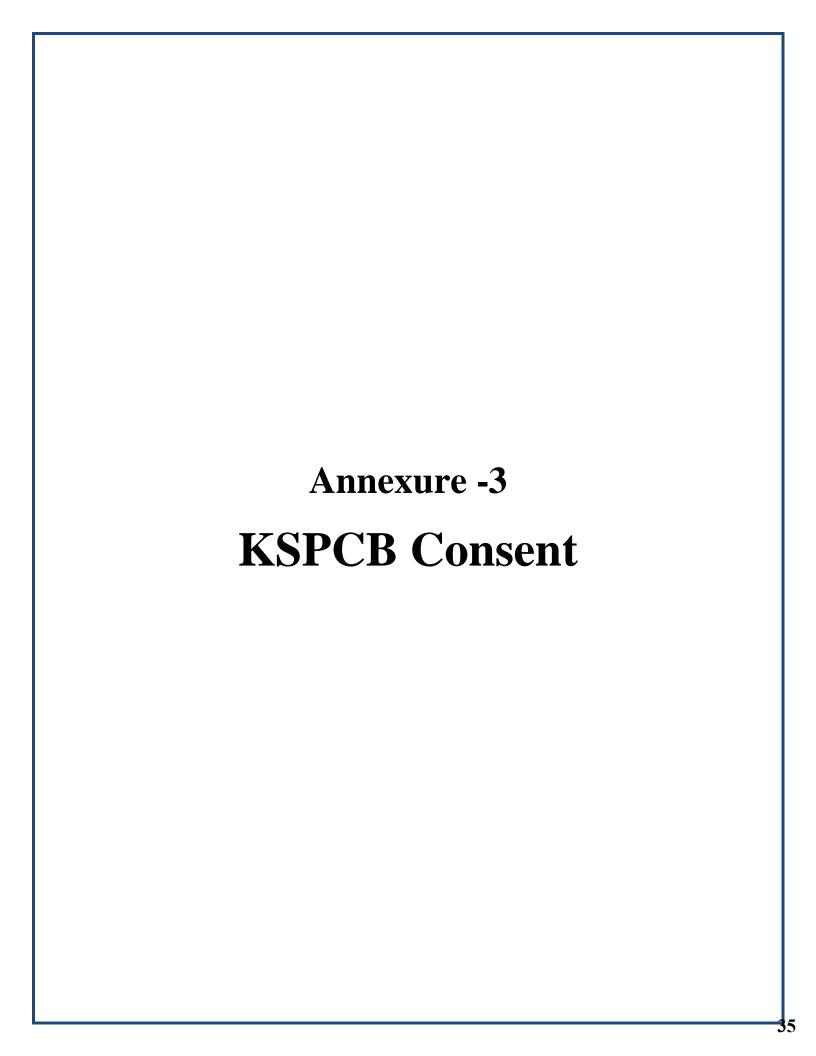

FILE NO: KSPCB/KT/ICO/10013949/2022

Date of issue: 08-11-2022





KERALA STATE POLLUTION CONTROL BOARD CONSENT TO

OPERATE/AUTHORISATION/REGISTRATION

ISSUED UNDER

The Water (Prevention & Control of Pollution) Act, 1974

The Air (Prevention & Control of Pollution) Act, 1981

and

The Environment (Protection) Act, 1986

As per Application No.: 10013949 Dated: 25-10-2022

To

GRANITE BUILDING STONE QUARRY OF Mr. DINEESH VIJAYAN KUDAKKACHIRA P O , KOTTAYAM

Consent No.: KSPCB/KT/ICO/10013949/2022

Valid Upto : 30-09-2027

1. GENERAL

1.1. This integrated consent is granted subject to the power of the Board to withdraw consent, review and makevariation in or revoke all or any of the conditions as the Board deems fit

1	VALIDITY	30-09-2027
2	Name and Address of the establishment	GRANITE BUILDING STONE QUARRY OF Mr. DINEESH VIJAYAN KUDAKKACHIRA P O, KOTTAYAM E-Mail: onlinepcbktm@gmail.com Contact Number: 9497235695
3	Occupier Details	DINEESH VIJAYAN ORATHANIYIL HOUSE, KUDAKKACHIRA PO, PALA, KOTTAYAM E-Mail: onlinepcbktm@gmail.com Contact Number:
4	Local Body	KAROOR
5	Survey Number	140/2 , 140/2-1 , 140/2-1-1
6	Village	Vallichira
7	Taluk	Meenachil
8	District	KOTTAYAM
9	Capital Investment(Rs in Lakhs)	100.0
10	Scale	Small
11	Category	RED
12	Annual fee(Rs)	25000.0
	Total Fee remitted(Rs)	125000.0
13	Activity	GRANITE BUILDING STONE- 105.01 Metric Tonnes/Day
14	Machinery details	

2. Conditions as Per The Water(Prevention and Control of Pollution)Act, 1974

- 2.1 In case of generation of trade effluent from the industry, effluent treatment system consisting oftreatment units having adequate capacity established as per the proposal submitted along with theapplication shall be made functional before commissioning. Additional facilities required, if any, to achieve the standards laid down by the Board u/s 17(1) (g) of the Water Act shall also be made along with.
- 2.2 Water Consumption: 5600 LPD
- 2.3 Effluent Generation: 2400LPD
- 2.4 Sewage / waste water with only organic contaminant if any, generated in the unit, shall be discharged through scientifically designed septic tank and soak pit system as per the follows IS code.
- i. Septic tank as per IS 2470 (Part 1): 1985.
- ii. Soak pit with sealed bottom, honey comb side wall 65 cm thick 2 mm sand all around.

Mode of disposal of treated effluent: Soakpit

2.5 Soak pit shall be at least 10 m away from the water intake well/nearby drinking water wells

3. Conditions as Per The Air(Prevention and Control of Pollution)Act, 1981

- 3.1 Adequate air pollution control measures shall be provided before commissioning of the industry. Additional facilities required, if any, to achieve the standards laid down by the Board shall also be installed.
- 3.2 Emission characteristics shall not exceed ambient air quality specified by national air quality standard
- 3.3 All operations likely to produce dust or noise shall be carried out within sufficiently closed and insulatedarea
- 3.4 The PM10 in ambient air at the boundary shall not exceed 100 microgram / m3
- 3.5 The PM 2.5 in ambient air at the boundary shall not exceed 60 microgram/m3
- 3.6 There shall not be any fugitive emission from the premises
- 3.7 The D. G. sets shall be provided with a minimum chimney height 0.2root KVA meters above roof levelof the highest nearby building (Where KVA is the capacities of all DG sets). The D. G. sets shall be placed a minimum distance of root(KVA/2) meters from the neighbouring residences / worship places /institutions (where KVA is the capacity of DG sets).

4. Conditions as Per The Environment (Protection) Act, 1986.

4.1 The construction activities shall be carried out strictly in compliance with the provisions of the

NoisePollution (Regulation and Control)Rules 2000. The sound level measured 1 m outside the boundary of theunit shall not exceed the National ambient noise standards applicable to adjoining area.

- 4.2 Used lead acid batteries shall be disposed of as per the Batteries (Management and Handling) Rules, 2001
- 4.3 Hazardous waste generated, if any, shall be handled as per the Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016.:NA
- 4.4 e-waste shall be disposed of safely as per the E-Waste (Management) Rules, 2016.
- 4.5 Proper Solid waste management system shall be provided in the unit, arrangements for collection, segregation, storage, handling and disposal of solid Waste including garbage shall be provided as per SWMRules 2016 and the facility shall be maintained properly.

5.GENERAL CONDITIONS

- 5.1 This consent is granted subject to the power of the Board to review and make variations in all or any ofthe conditions as per section 21(6) of the Air (Prevention & Control) of pollution Act 1981 & section 27 of
- the water (Prevention &control) of pollution Act 1974.
- 5.2 Green belt of sufficient height shall be provided with fast growing species such as bamboos forpreventing dust and noise pollution.
- 5.3 For renewal of the consent in case of continuance of operation of the industry, application in the prescribed form shall be submitted through the web portal of the Board for renewing the Consent on orbefore two months in advance to expiry date. Late application will be accepted with 10%(for application before expiry date) & 50% of yearly fee as late fee for application after due date.
- 5.4. The occupier shall comply with all the environmental rules and the related act stipulated by the government, relevant instructions issued by the Board in time to time for the prevention and control of pollution and protection of environment.
- 5.5 No change or alteration of the unit or equipment capacity shall be made without the prior permission of the Board. Any change in the particulars furnished in the references or in the identity of the occupier / authorised agent is to be intimated to the Board forthwith.
- 5.6 Adequate green cover and green belt shall be provided in the unit with continual improvement of number of trees and vegetation in and around the campus. Nonconventional energy sources (solar, wind, biogas, etc) shall be utilized to the maximum extent to meet the energy need.
- 5.7 Location of the unit shall be as shown in the drawing attached. No change or alteration to the above shallbe made without obtaining prior permission from the board.
- 5.8 Maintain hygienic condition and good housekeeping practices shall be maintained in and around theunit.
- 5.9 Set back as per rules shall be provided between the boundary and the building.

- 5.10 This consent is granted based on the particulars and affidavit submitted by the Entrepreneur and anyviolation/non-compliance/submission of false information will lead to cancellation of consent and stringentaction against the applicant and occupier. In the case of noncompliance of integrated consent conditions, the consent issued will be withdraw/cancelled, and fee will be lapsed automatically.
- 5.11 The consented shall put up a sign board of size 6x4 ft. near the main entrance of the plant to display thename of the unit and important consent conditions.
- 5.12 The occupier shall comply with all the environmental rules and the related act stipulated by the government, relevant instructions Board may issue from time to time for the prevention and control of pollution and protection of environment.
- 5.13 Arrangements of rain water harvesting including open pond/ well / Bore well/ Ground water rechargingshall be provided. Rain water harvesting facility shall be installed in the unit within three month and photosof the same shall be submitted in this office via e-mail:onlinepcbktm@gmail.com.

6. SPECIFIC CONDITIONS


- 6.1 "The consent issued from the Board will be valid only for a period during the period when all other statutory or necessary clearances from other concerned authorities are valid. The consent issued from the Board is only with respect to the powers vested under the Water Act, 1974, Air Act 1981 and Rules there under. The operation of the unit shall be commenced only after obtaining clearances from all concerned authorities".
- 6.2 All the Conditions given in the Environmental clearance shall be strictly complied with, A copy of compliance report shall be submitted to the district office in regular interval specified in the EC.
- 6.3 Mining shall be only done as per the approved mining plan and approval of district geologist.
- 6.4 Annual environmental statement shall be submitted on or before 31 st March every year.
- 6.5 Regular wetting of the road in the premises of the unit quarry and approach roads near the quarry shall be done for avoiding excessive dust emission within and outside the boundary.
- 6.6 There shall not carry out any mining activity between 6.00 pm to 6.00 am.
- 6.7 There shall be a minimum distance of 50m from boundary of quarry operating area to residential building, place of worship, public buildings, public road having vehicular traffic, river or lake, railway line, bridges etc as per PCB/HO/CIRCULAR-01/03/2017, dated 10/10/2017.
- 6.8 Boundary shall be fenced before operation of quarrying activities.
- 6.9 Suitable species of trees and curtain plants shall be planted and maintained within and along the periphery of the premises, forming a green belt to improve the environment. And reduce air and noise pollution.
- 6.10 Bench cutting method shall be adopted for quarrying. Blasting shall be done with electronic detonators and prior signals in specified time.


- 6.11 Quarrying operations shall be started only after obtaining Mining permit/lease from Mining & Geology Department and D & O License under the Kerala Panchayat Raj Act from the concerned Local Self Government.
- 6.12 Adequate safety measures shall be provided in accordance with the fire & safety regulations.
- 6.13 After completion of mining, the mining area shall be reclaimed as per approved mine closure plan.
- 6.14 Mining below normal water table by continuous pumping shall be avoided in summer period (March, April& May) to prevent drinking water shortage in that area.
- 6.15 No other machineries, other than that specified in the consent shall be operated in the quarry withoutprior Consent of the Board.


Digitally signed by Biju B Date: 2022.11.08 16:10:37 IST

SIGNATURE OF ISSUING AUTHORITY

ENVIRONMENTAL ENGINEER

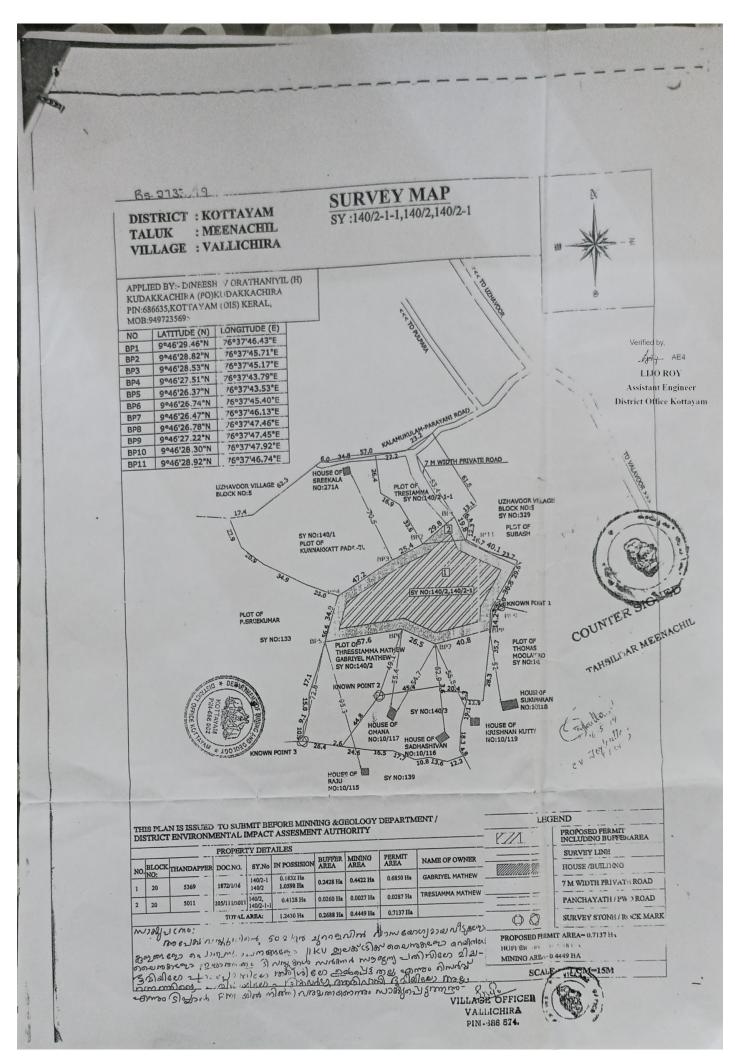

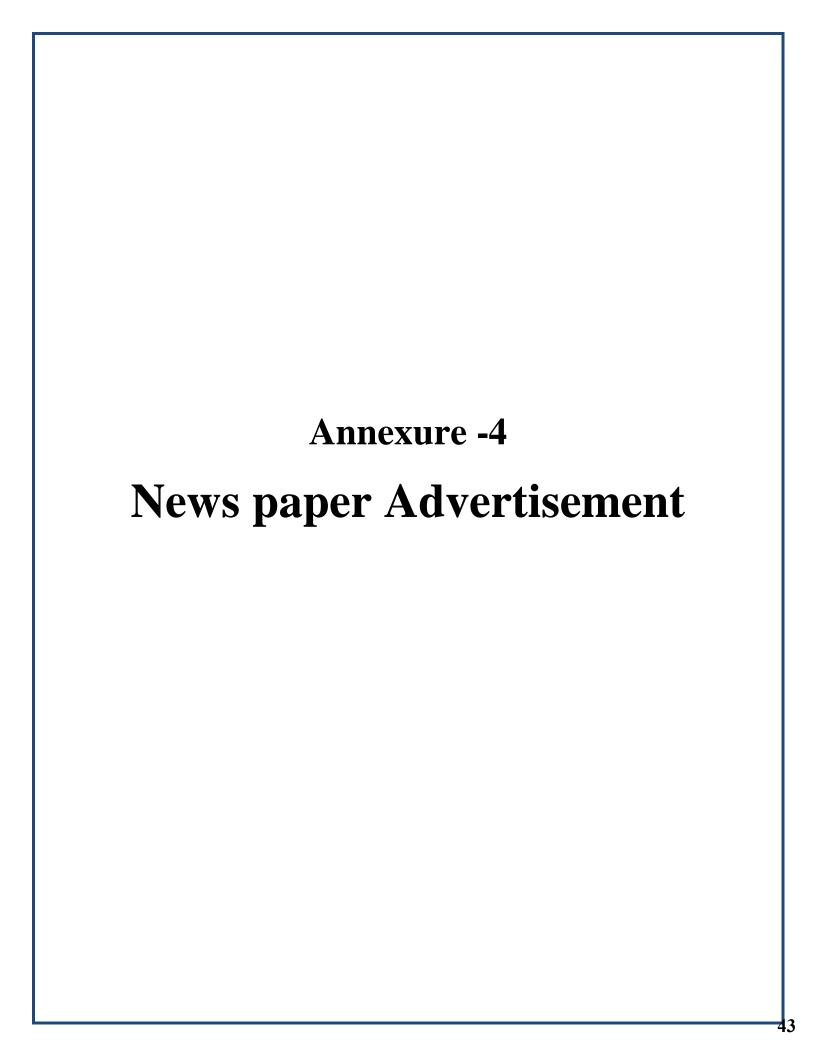

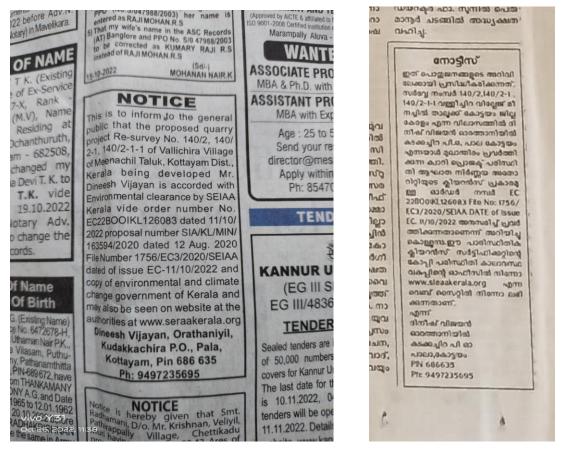

HINDU MADYAMAM